



Norsat 3000 Series

C-Band PLL LNBs



TYPICAL SPECIFICATIONS

Noise temperature	20K to 30K depending on model number
L.O. stability (over temperature excl offset)	±5 kHz to ±25 kHz depending on model number
Phase noise (SSB)	-73 dBc/Hz at 1kHz -83 dBc/Hz at 10kHz -93 dBc/Hz at 100kHz
Input VSWR	2.2 : 1
Output VSWR	2.2 : 1

FREQUENCY BANDS AVAILABLE

Input frequency (GHz)	3.40 to 4.20	4.50 to 4.80
L.O. frequency (GHz)	5.15	5.95
Output frequency (MHz)	950 to 1750	1150 to 1450

HOW TO ORDER C-BAND 3000


3120N

CONNECTOR.....	F - 75 Ohm N - 50 Ohm
NOISE TEMPERATURE.....	15 - 15K 20 - 20K 25 - 25K 30 - 30K
L.O. STABILITY.....	1ppm - ±5 kHz 2ppm - ±10 kHz 5ppm - ±25 kHz

LNB SERIES #

Conversion gain	62 dB
Output P1dB	9 dBm
Power requirements	+15 to +24 V supplied through center conductor of IF cable
Current drain	330 mA
Dimensions	180 (L) x 100 (W) x 70 (H) mm (7.1 x 4.0 x 2.8 in)
Weight	700 g / 25 oz

MECHANICAL DIAGRAM

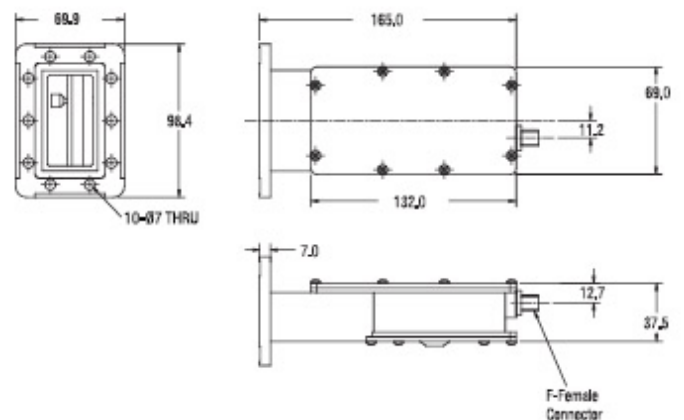

ATCI

www.atci.com